


Flat Square Recess w/Nibs

TYPE-17 DECK

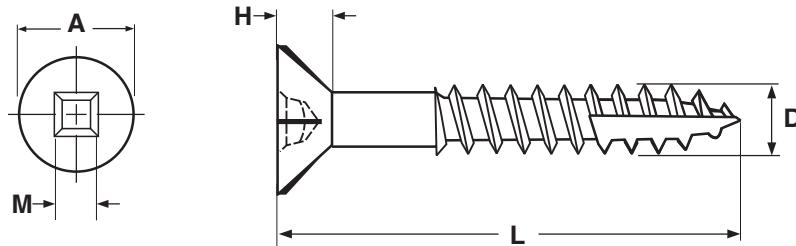

FLAT HD WITH NIBS SQUARE RECESS DECK SCREW WITH TYPE-17 POINT							
Nominal Diam- eter	A		H	M	D		Recess Size
	Head Diameter		Head Height	Recess Diam.	Major Diameter		
	Max	Min	Ref	Ref	Max	Min	
6	0.262	0.237	0.083	0.091	0.148	0.135	#1
8	0.312	0.285	0.150	0.112	0.177	0.157	#2
8	0.322	0.306	0.122	0.112	0.177	0.161	#2
9	0.336	0.309	0.150	0.112	0.198	0.187	#2
9	0.322	0.306	0.121	0.112	0.197	0.181	#2
10	0.377	0.342	0.172	0.112	0.215	0.204	#2
10	0.362	0.345	-	0.112	0.210	0.192	#2
Tolerance on Length		Up to 1.5"		± 0.05			
		Over 1.5 to 2.75"		± 0.06			
		Over 2.75"		± 0.09			

Description	An externally threaded fastener with a countersunk head, square socket recess, a single lead thread. The screw has a chip cavity cut out where the final several threads end at the tip.
Applications / Advantages	Designed for outdoor use with decks, spas, siding, fences and docks. Colored Ruspert coating is rated to resist environmental corrosion without streaking the treated lumber.
Material	Low Carbon Steel
Surface Hardness	Vickers HV 550 - 800
Plating	Available in green, tan and red Ruspert ceramic finishes rated as salt spray resistant for over 1,200 hours.